

DEMOLITION TOOL



G-9S - 9.0kg



TCA-7 - 7.2kg

- Light-weight and high power
- Automatic push throttle valve
- Few parts for easy maintenance
- Durable forged body
- With chisel bush for long life

Optional accessories for TCA-7 & G-9S

Model	Description	Length (mm)	Shank Size 26ø x 80mm
M7	Moil Point	400	
M7N	Moil Point	450	
M7L	Long Moil Point	600	
M7LL	Long Moil Point	1200	
C7	Chisel	400	
D7	Asphalt Cutter	450	

TCD-TRENCHER & CLAY DIGGER



TCD-20 - 10kg



TCD-30 - 13.6kg (Optional Accessories Pg. 14)

- Latch retainer for quick chisel change
- Optional Muffler available on request

Optional Accessories for TCD-20

Model	Description	Length (mm)	Shank Size 7/8"Hex x 3/4"
M9	Moil Point	480	
M9L	Long Moil Point	710	
M9LL	Long Moil Point	1100	
C9	Chisel	475	
S9	Spade 4"	475	

TCB-CONCRETE BREAKER



TCB-200 - 21kg



TCB-300 - 30kg

- Simple Structure
- Compact and light weight
- Less maintenance
- Powerful and durable


Optional Accessories for TCB-200 & TCB-300

Model	Tools	Type
M23	TCB-200	
M33	TCB-300	
C23	TCB-200	
C33	TCB-300	

Specifications: Air Pressure 6kg/cm²

Model	Piston Diameter (mm)	Piston Stroke (mm)	Blow Per Min (bpm)	Net Weight (kg)	Overall Length (mm)	Avg. Air Cons.		Air Inlet (pt)	Hose Size (mm)	Shank Size
						(m ³ /min)	(cfm)			
G-9S	36.00	97	1,800	9.0	470	1.20	42.0	1	19.0	R26 x 80mm
TCA-7	35.00	120	1,250	7.2	465	1.00	35.3	3/4	19.0	R26 x 80mm
TCD-20	42.85	60	2,000	10.0	520	1.10	38.8	1/2	12.7	7/8" Hex x 3 1/4"
TCD-30	44.45	85	1,550	13.6	559	1.40	49.4	1/2	12.7	1"Hex x 4 1/4"
TCB-200	40.00	165	1,100	21.0	556	1.40	49.4	1	19.0	R30 x 87mm
TCB-300	45.00	180	950	30.0	610	1.70	60.0	1	19.0	R35 x 87mm

TPB SERIES - Concrete Breaker

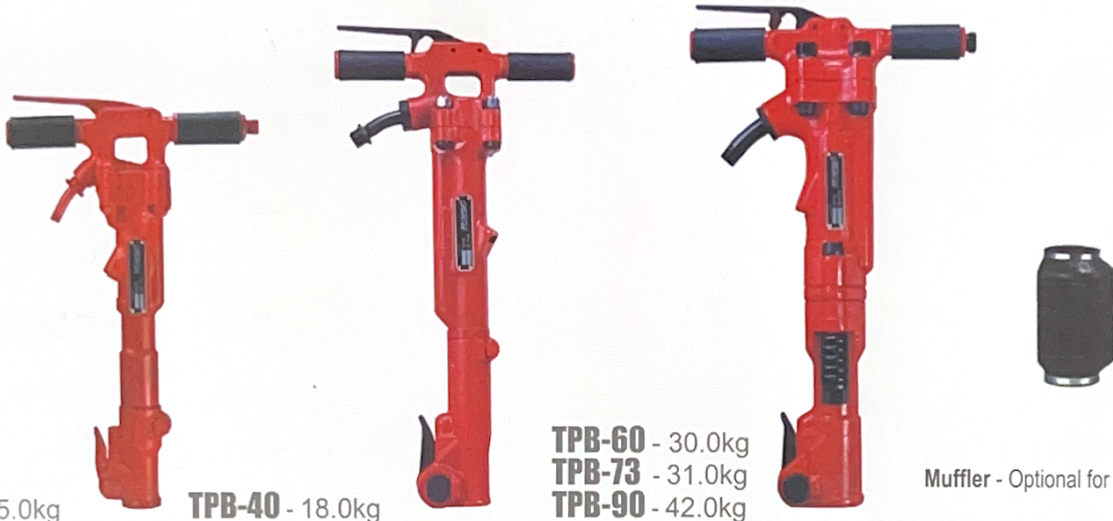




TPB-30 - 15.0kg **TPB-40** - 18.0kg

TPB-60 - 30.0kg
TPB-73 - 31.0kg
TPB-90 - 42.0kg





Muffler - Optional for all breakers

- Forged steel body for maximum durability
- 4-Bolt head design - rugged handling
- Latch Retainer - quick chisel changing

Optional Accessories for TCD-30, TPB-30, TPB-40 (for more accessories please see Pg. 60)

Model	Description	OA Length (mm)	Shank Size 1"Hex x 4/4"	Model	Description	OA Length (mm)	Shank Size 1"Hex x 4/4"	
M4	Moil Point	580		D4	Digger 3"	500		
M4L	Long Moil Point	1330		DW4	Digger 5"	490		
C4S	Chisel	500		A4	Asphalt Cutter	505		

Optional Accessories for TPB-60, TPB-73, TPB-90 (for more accessories please see Pg. 60)

Model	Description	OA Length (mm)	Shank Size 1/4"Hex x 6/4"	Model	Description	OA Length (mm)	Shank Size 1/4"Hex x 6/4"		
M1S	Moil Point	550		DW1	Digger 5"	545			
M1	Moil Point	620			A1	Asphalt Cutter		540	
M1L	Moil Point	760			D1	Digger 3"		570	

Specifications: Air Pressure 6kg/cm²

Model	Piston Diameter (mm)	Piston Stroke (mm)	Blow Per Min (bpm)	Net Weight (kg)	Overall Length (mm)	Avg. Air Cons.		Air Inlet (pt)	Hose Size (mm)	Shank Size
						(m ³ /min)	(cfm)			
TPB-30	44.45	85	1,550	15	564	1.4	49.4	1/2	12.7	1"Hex x 4/4"
TPB-40	44.00	146	1,100	18	660	1.6	56.5	3/4	19.0	1"Hex x 4/4"
TPB-60	57.15	100	1,400	30	645	2.0	70.6	3/4	19.0	1/4"Hex x 6"
TPB-73	57.15	144	1,200	31	690	1.8	63.6	3/4	19.0	1/4"Hex x 6"
TPB-90	66.67	152	1,250	42	723	2.2	77.7	3/4	19.0	1/4"Hex x 6"